

**Don't just seal, SURESEAL**



## **CENTRON**

### ***SureSeal™* SE160**

TUBE SEALER

#### **Versatility comes in standard**

*SureSeal™* SE160 is designed in consideration of multi tube sealing environment. It provides an ideal space-efficient solution.

#### ■ Features

- Premium sealing quality - new wide-sealing technology
- Adjustable Power Mode - the world-first sealing optimization technology  
One sealer guarantees the best result with any blood bag in the market.
- Multi tube sealer set up - automatic sequential sealing
- Variable sealing spacing: 75, 80, 85, 90, 95 mm  
(or, any distance up to 200 mm upon request)
- Simple operation, fast sealing, no warm-up required
- Sealing hand unit ready
- Automatic tubing detection
- Arc detection
- LED indicator to show sealing progress and alarms
- Applicable to wide range of blood bag tubing
- Head protector / Splash guard for user safety

**Centron**

Smart Solutions for Smarter Bloodbanking

New state-of-the-art sealing head

- New sealing technology ensures safe sealing of even thick and sensitive tubings with wide sealed surface.
- Adjustable Power Mode - User can easily choose sealing power output according to blood bag maker, type and operating conditions. Combined with existing micro-tuning optimization process, user can always expect reliable outcome. Please provide us with blood bag information and operating condition for recommended power mode.
- Sealing will automatically start when tubing is placed in the sealing head.
- Head protector for safe and easy operation - detachable, easy to clean
- Applicable tubing diameter 2-6 mm (1/4")




Splashguard

- protects users from accidental blood splash
- Detachable, easy to clean

Indication lamp

- shows sealing progress




Wide sealed surface with notch at the center

- Reliable sealing quality prevents leakage
- Easy to segment



Multi tube sealing setup example

- Linkage bars are provided for easy multi sealing head unit installation.
- Sealing hand unit can be attached at any main unit.

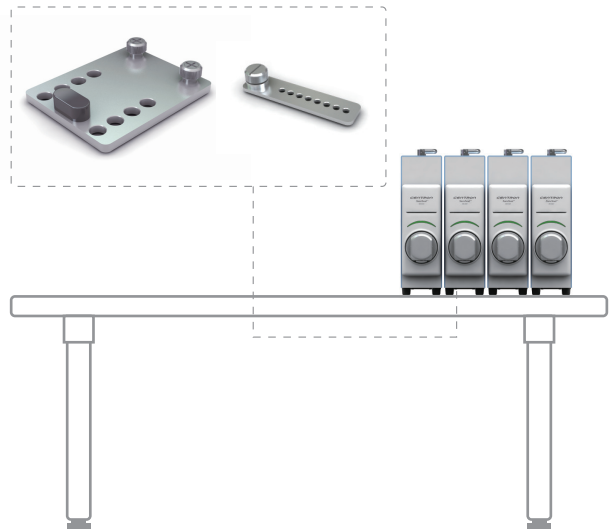

Specification

Product	TUBE SEALER
Model	SE160
Main Power	100-250V~ 50/60Hz 250W
Dimension	Main unit: 69(W)mm/350(L)mm/245(H)mm
	Hand unit: 28(W)mm/204(L)mm/44(H)mm

Information



DISTRIBUTOR

Centron Centron Corporation

Address: 44 Beolmal-ro, Dongan-gu, Anyang, Gyeonggi-do,  
Postal Code 14059 / Republic of Korea  
Phone: +82-31-422-7890 / Fax: +82-31-422-7866  
E-mail: info@centrons.com  
Website: www.centrons.com



※ The specification and design are subject to change without prior notice for product upgrades.